


INNOVATION

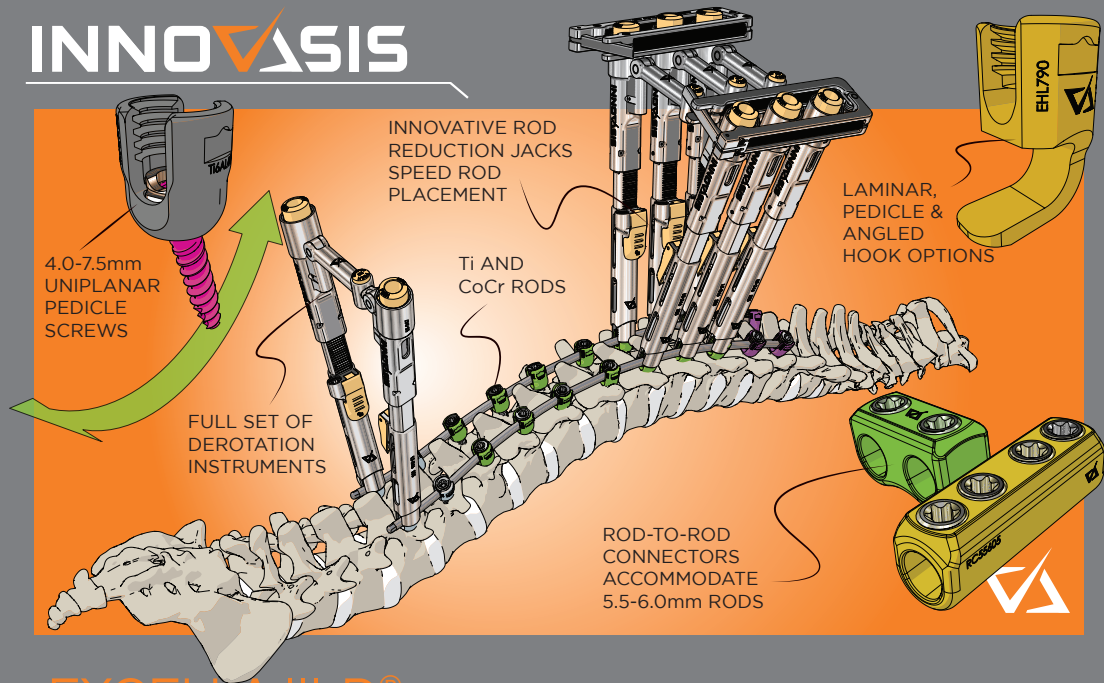


▶ EXCELLA III-D[®] (DEFORMITY SYSTEM)

► SPECIFICATIONS

EXCELLA III-D® DEFORMITY SYSTEM	Diameter (mm)	Range (5mm incr.)	5.5 Rods	Other
	4.0	25-45	Ti Straight: 35-120, 460,500	Contains derotation instruments, a variety of hooks, rod-to-rod connectors, reduction screws, Iliac screws, offset and cross connectors.
	4.75	25-45	Ti Pre-Bent: 35-125	
	5.5	30-55		
	6.5	30-60	CoCr Straight: 500, 600	
	7.5	30-60		
	8.5	30-60		

INNOVATION

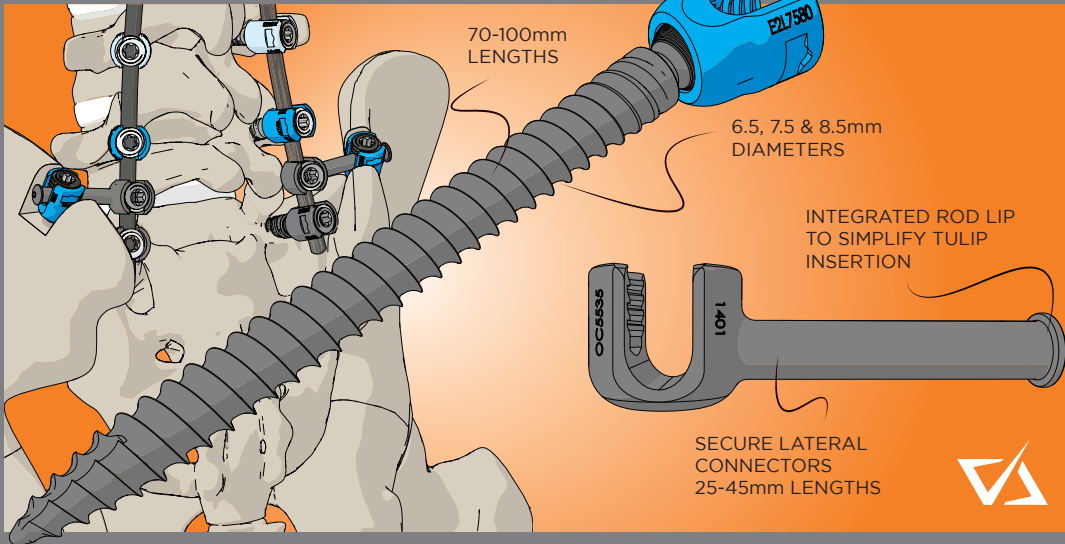


▶ EXCELLA® ILIAC



► SPECIFICATIONS

EXCELLA® ILIAC 8 OFFSET CONNECTORS	Diameter (mm)	Range (10mm incr.)	Offset Connectors
	6.5	70-100	5.5 x 25mm
	7.5	70-100	5.5 x 35mm
	8.5	70-100	5.5 x 45mm

INNOVATION

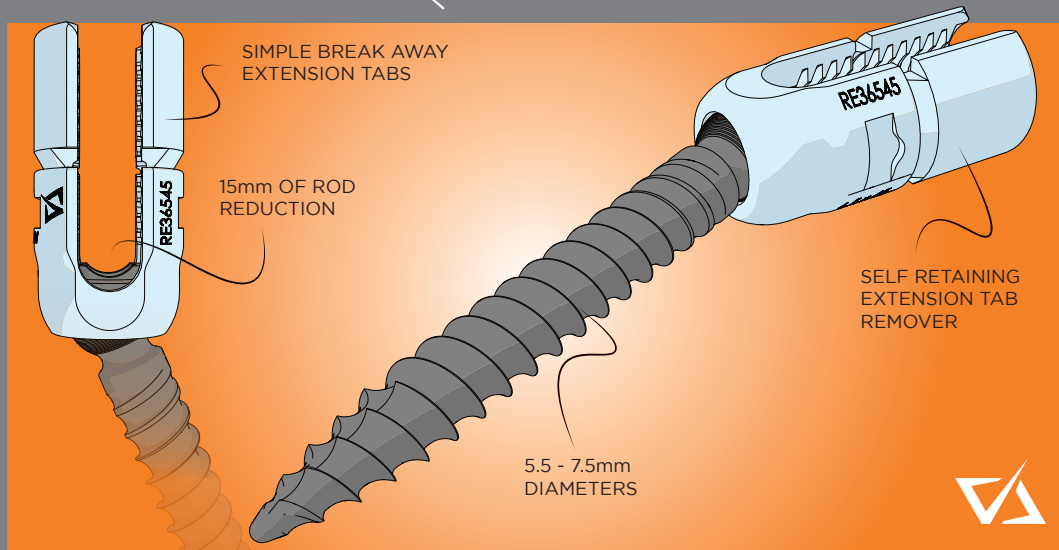

▶ EXCELLA® REDUCTION



► SPECIFICATIONS

EXCELLA® REDUCTION	Diameter (mm)	Range (mm)	Rod Diameter (mm)
	5.5	30-50	5.5
	6.5	30-50	
	7.5	30-50	